




Grande ouverture-
Large opening

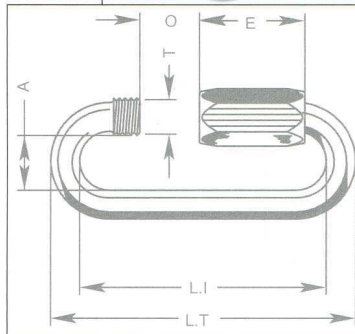

T1 Acier Zingué/Zinc plated steel

Réf	Diamètre/size		Dimensions-mm							Poids/weight	CU/WLL	CR/BL
	mm	inch	L.T.	L.I.	A	O	E	T	kg/100pcs	kg	kg	
MRGOZ02.5	2,5	3/32"	33,0	28,0	7,0	7,0	12,0	3,5	0,350	30	150	
MRGOZ03.0	3,0	7/64"	39,5	33,5	8,5	8,5	13,5	4,0	0,677	45	225	
MRGOZ03.5	3,5	1/8"	46,0	39,0	10,0	10,0	16,0	5,0	1,020	90	450	
MRGOZ04.0	4,0	5/32"	53,0	45,0	11,5	11,5	19,0	6,0	1,500	160	800	
MRGOZ05.0	5,0	3/16"	62,0	52,0	13,0	13,0	22,0	7,0	2,500	250	1 250	
MRGOZ06.0	6,0	1/4"	70,5	58,5	14,5	14,5	25,0	9,0	4,100	350	1 750	
MRGOZ07.0	7,0	9/32"	79,0	65,0	16,0	16,0	28,0	10,0	6,000	500	2 500	
MRGOZ08.0	8,0	5/16"	88,0	72,0	17,5	17,5	31,5	11,0	9,100	650	3 250	
MRGOZ09.0	9,0	3/8"	95,0	77,0	19,0	19,0	33,0	12,0	11,800	800	4 000	
MRGOZ10.0	10,0	7/16"	105,5	85,5	20,5	20,5	36,0	13,0	15,700	1 000	5 000	
MRGOZ12.0	12,0	1/2"	124,0	100,0	23,5	23,5	43,0	15,0	26,800	1 250	6 250	
MRGOZ14.0	14,0	9/16"	142,0	114,0	26,5	26,5	49,0	17,0	42,000	2 000	10 000	
MRGOZ16.0	16,0	5/8"	161,0	129,0	29,5	29,5	54,0	19,0	63,000	2 500	12 500	
MRGOZ18.0	18,0	11/16"	176,5	140,5	32,5	32,5	62,0	22,0	87,920	3 000	15 000	
MRGOZ20.0	20,0	25/32"	198,5	158,5	35,5	35,5	71,0	24,0	122,000	3 600	18 000	

T2 Inox/Stainless steel

Réf	Diamètre/size		Dimensions-mm							Poids/weight	CU/WLL	CR/BL
	mm	inch	L.T.	L.I.	A	O	E	T	kg/100pcs	kg	kg	
MRGOI02.5	2,5	3/32"	33,0	28,0	7,0	7,0	12,0	3,5	0,360	90	450	
MRGOI03.0	3,0	7/64"	39,5	33,5	8,5	8,5	13,5	4,0	0,700	145	725	
MRGOI03.5	3,5	1/8"	46,0	39,0	10,0	10,0	16,0	5,0	1,050	200	1 000	
MRGOI04.0	4,0	5/32"	53,0	45,0	11,5	11,5	19,0	6,0	1,540	250	1 250	
MRGOI05.0	5,0	3/16"	62,0	52,0	13,0	13,0	22,0	7,0	2,570	400	2 000	
MRGOI06.0	6,0	1/4"	70,5	58,5	14,5	14,5	25,0	9,0	4,200	580	2 900	
MRGOI07.0	7,0	9/32"	79,0	65,0	16,0	16,0	28,0	10,0	6,150	800	4 000	
MRGOI08.0	8,0	5/16"	88,0	72,0	17,5	17,5	31,5	11,0	9,330	980	4 900	
MRGOI09.0	9,0	3/8"	95,0	77,0	19,0	19,0	33,0	12,0	12,100	1 250	6 250	
MRGOI10.0	10,0	7/16"	105,5	85,5	20,5	20,5	36,0	13,0	16,100	1 600	8 000	
MRGOI12.0	12,0	1/2"	124,0	100,0	23,5	23,5	43,0	15,0	27,470	2 200	11 000	
MRGOI14.0	14,0	9/16"	142,0	114,0	26,5	26,5	49,0	17,0	43,050	3 100	15 500	
MRGOI16.0	16,0	5/8"	161,0	129,0	29,5	29,5	54,0	19,0	64,580	4 000	20 000	

Couple de serrage (N.m)
Tightening torque (N.m)

Ø F	Couple
2,5	0,15
3,0	0,30
3,5	0,60
4,0	0,70
5,0	0,80
6,0	1,20
7,0	2,50
8,0	3,00
9,0	4,50
10,0	7,00
12,0	9,00
14,0	12,00
16,0	18,00
18,0	30,00
20,0	40,00


T3 Zicral/Zicral

Réf	Diamètre/size		Dimensions-mm							Poids/weight	CU/WLL	CR/BL
	mm	inch	L.T.	L.I.	A	O	E	T	kg/100pcs	kg	kg	
MRGOZIC07.0	7,0	9/32"	79,0	65,0	16,0	16,0	28,0	10,0	2,154	200	1 000	
MRGOZIC10.0	10,0	7/16"	105,0	85,0	20,5	20,5	36,0	13,0	5,600	400	2 000	

T4 Laiton/Brass

Réf	Diamètre/size		Dimensions-mm							Poids/weight	CU/WLL	CR/BL
	mm	inch	L.T.	L.I.	A	O	E	T	kg/100pcs	kg	kg	
MRGOL03.0	3,0	7/64"	39,5	33,5	8,5	8,5	13,5	4,0	0,700	40	200	
MRGOL03.5	3,5	1/8"	46,0	39,0	10,0	10,0	16,0	5,0	1,050	70	350	
MRGOL04.0	4,0	5/32"	53,0	45,0	11,5	11,5	19,0	6,0	1,540	100	500	
MRGOL05.0	5,0	3/16"	62,0	52,0	13,0	13,0	22,0	7,0	2,570	150	750	
MRGOL06.0	6,0	1/4"	70,5	58,5	14,5	14,5	25,0	9,0	4,200	250	1250	
MRGOL07.0	7,0	9/32"	79,0	65,0	16,0	16,0	28,0	10,0	6,150	400	2000	
MRGOL08.0	8,0	5/16"	88,0	72,0	17,5	17,5	31,5	11,0	9,330	550	2750	

Œil-Eyelet



T5 Acier Zingué/Zinc plated steel

Réf	Diamètre/size		Dimensions-mm										Poids/weight	CU/WLL	CR/BL
	mm	inch	L.T.	L.I.	L.O.	H.T	H.I	O	E	R1	R2	T	kg/100pcs	kg	kg
MRCEZ03.0	3,0	7/64"	20,0	14,0	11,0	44,0	38,0	4,0	9,0	7,0	2,50	4,0	0,674	32	160
MRCEZ03.5	3,5	1/8"	23,0	16,0	13,0	51,0	44,0	5,0	11,0	8,0	3,00	5,0	1,062	56	280
MRCEZ04.0	4,0	5/32"	28,0	20,0	15,0	59,0	51,0	5,5	12,5	10,0	3,50	6,0	1,594	80	400
MRCEZ05.0	5,0	3/16"	33,0	23,0	18,0	68,0	58,0	6,5	16,0	11,5	4,00	7,0	2,762	120	600
MRCEZ06.0	6,0	1/4"	39,0	27,0	21,5	80,0	68,0	7,5	19,0	13,5	4,75	9,0	4,628	200	1 000
MRCEZ07.0	7,0	9/32"	43,0	29,0	24,8	89,0	75,0	8,5	21,5	14,5	5,40	10,0	6,785	320	1 600
MRCEZ08.0	8,0	5/16"	47,0	31,0	28,5	97,0	81,0	10,0	24,0	15,5	6,25	11,0	9,992	480	2 400

CU : charge utile / WLL : working load limit - CR : charge de rupture / BL : breaking load